

IR 402 Remote Control Instruction Guide

When used with the Extron System 5 IP or an Extron MediaLink™ Controller (MLC 226 IP, MLC 104 IP Plus), the IR 402 can be used for input selection and for audio, display, and source control.

NOTE The IR 402 does not work with the MLC 206 MediaLink Controller.

Operation


The buttons on the Extron IR 402 duplicate the power, volume, source selection, and function controls on a System 5 IP or MLC front panel. The switcher or MLC responds to IR 402 button presses as if the corresponding button or knob were pressed or turned at the switcher or controller.

NOTE The buttons on the IR 402 cannot be used to set up the switcher or controller.


The VCR and DVD control, function, display mute, and audio mute buttons can be used with or without any optional control modules. In order for these buttons to work, you must run the Global Configurator software and configure the buttons, programming each of them with commands. If not configured, those buttons do not function.

Install two AAA batteries as shown at right.

Refer to the System 5 IP, MLC 226 IP, or MLC 104 IP Plus user's manual and the Global Configurator help file for more information.

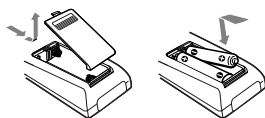

IR 402 Remote Control Instruction Guide, cont'd

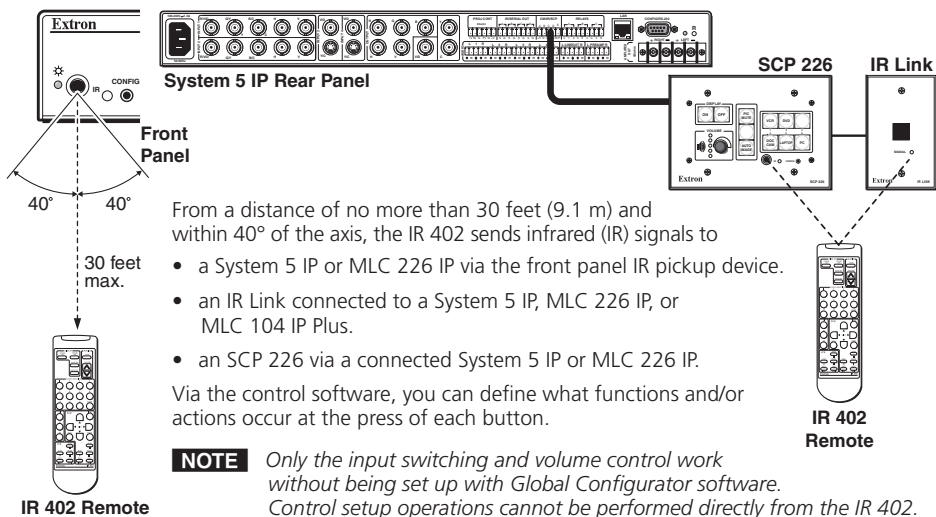

Extron Electronics, USA
1230 South Lewis Street
Anaheim, CA 92805
800.633.9876 714.491.1500
FAX 714.491.1517

Extron Electronics, Europe
Beeldschermweg 6C
3821 AH Amersfoort, The Netherlands
+800.3987.6673 +31.33.453.4040
FAX +31.33.453.4050

Extron Electronics, Asia
135 Joo Seng Rd. #04-01
PM Industrial Bldg., Singapore 368363
+800.7339.8766 +65.6383.4400
FAX +65.6383.4664

Extron Electronics, Japan
Kyodo Building, 16 Ichibancho
Chiyoda-ku, Tokyo 102-0082
Japan
+81.3.3511.7655 FAX +81.3.3511.7656

68-825-01 Rev. B
11 07